


High-pressure hydraulically driven
Low-pressure hydraulically driven



HYDRAULICALLY DRIVEN DECK MACHINERY

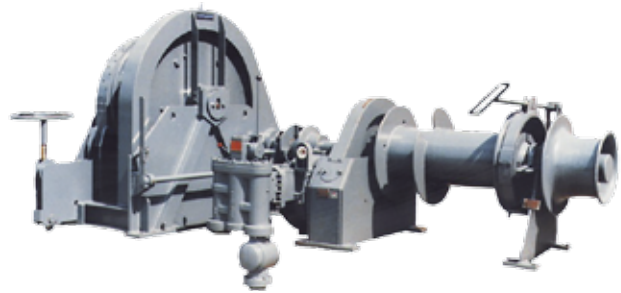

Mooring winches
Combined anchor and mooring winches
Windlass parts
Windlasses
Anchor capstans
capstans

STRUCTURAL FEATURES:

- Pulls: 30 - 500 kN
- Chain diameters:**
 - For 17 - 127 mm stud link chains and roller chain stoppers (bigger chain diameters on request)
 - Single or double drum design
 - Undivided or split-type drums
 - With or without auto-tension device
 - Automatic switch over for double drum mooring winches with auto-tension available
 - With or without remote control for mooring winch part
 - Design with fully or partially enclosed gear
 - With or without remotely controlled letting-go the anchor, with automatic speed limitation
 - With or without chain length and speed indication
 - With or without remote control from ships' sides or wheelhouse
 - Acc. ISO 3730 OCIMF recommendations

